


Possibilities to operate:

1. VBG valve box
2. C- connector
3. Palm- connector
4. Duomatic-connector

Betätigungsmöglichkeiten:

1. VBG Ventilkasten
2. C- Verbinder
3. Palm-Verbinder (Kupplungskopf standard rot)
4. Duomatik verbindung

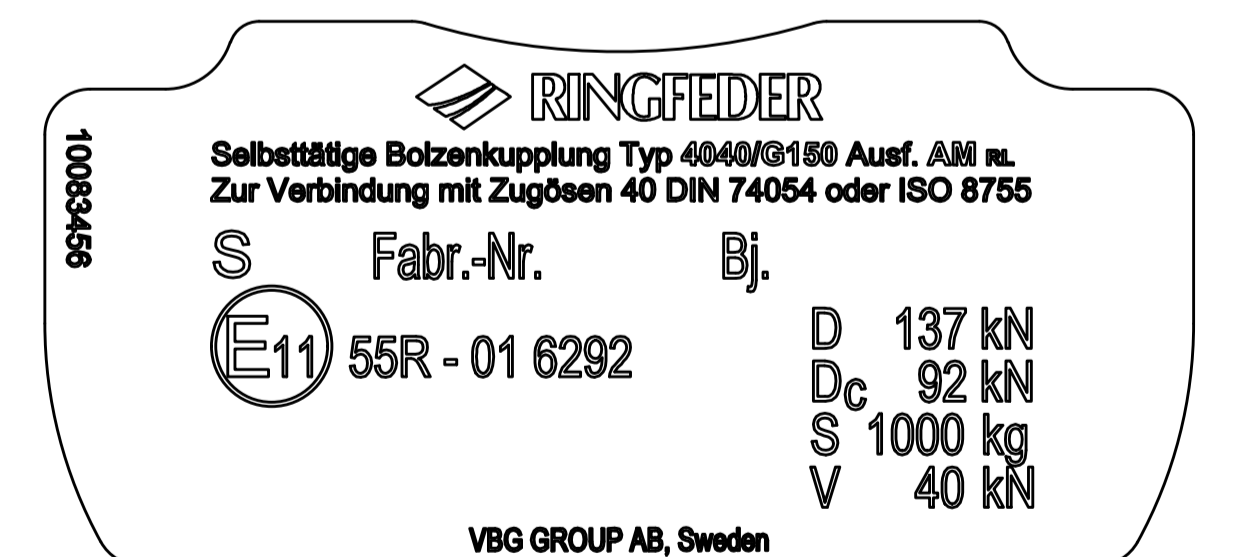

Winkelausschläge der Zugöse / angles of drawbar eye:

- Horizontal : ±110°
 Vertikal : ± 20°
 Axial : 360° bei einem Mindest-Drehmoment von 100Nm /
 360° if using minimum tightening torque of 100Nm

VBG GROUP		Modified Date 2014-04-23	Modified by SN	Modification No. 12202	Issue a
Description Automatic drawbar coupling Selbsttätige Bolzenkupplung Type 4040/G150 Ausf.AM		3D Model No. 14999529	Project No. 14999529	Engineer HBH	Checked by HBH
Stage A1	Drawing No. 1:2	Revision 1	Drawing Date 2014-04-23	SN	Info 14999529-info