




RINGFEDER®

Locking spring

404 AUS/5025 NZ/4025 NZ

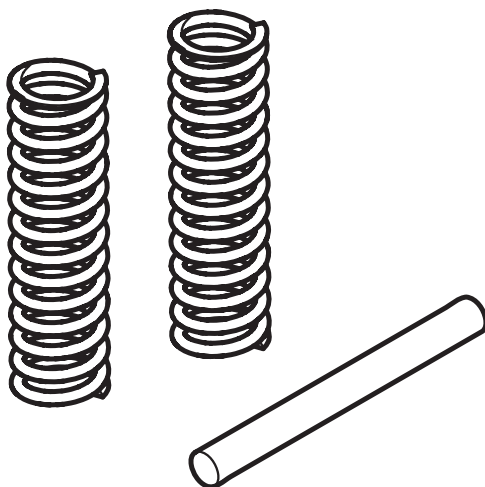



EN Installation



EN Dismantling






EN Function check



EN Pinch point!

EN General

Identify all parts before installation. Installation and service shall be carried out carefully and professionally.

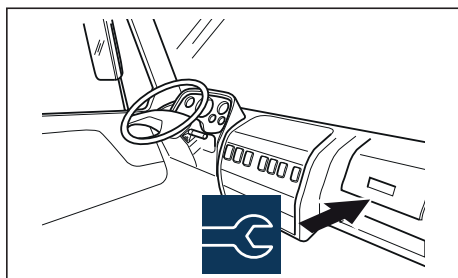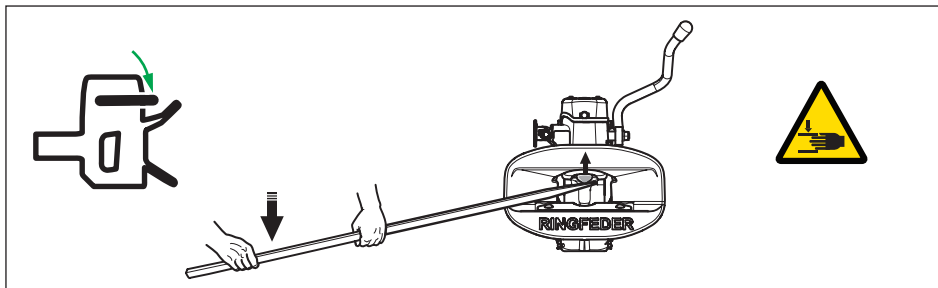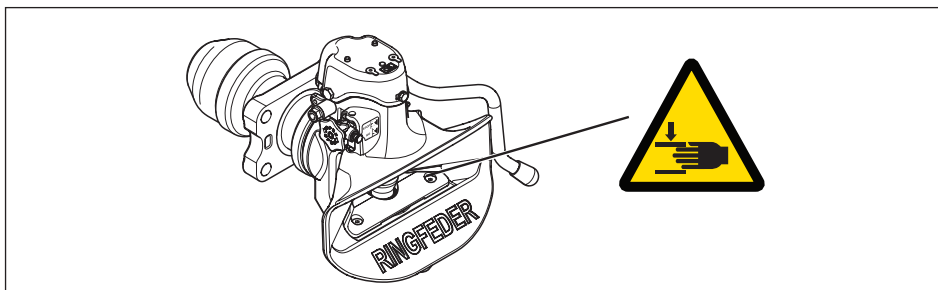


404 AUS/5025 NZ

15991144



x 2




x 1

4025 B NZ


15991145




x 2






x 1





1

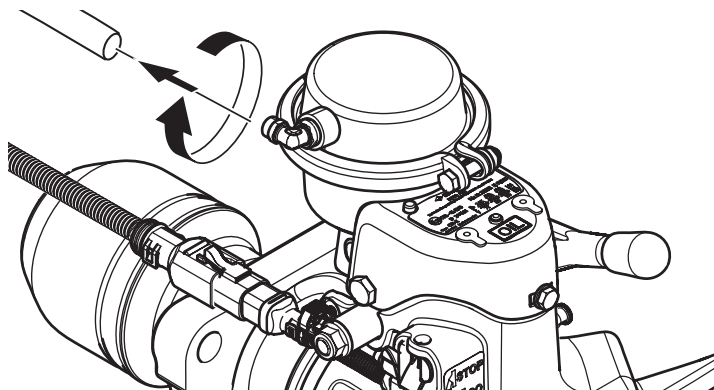


2

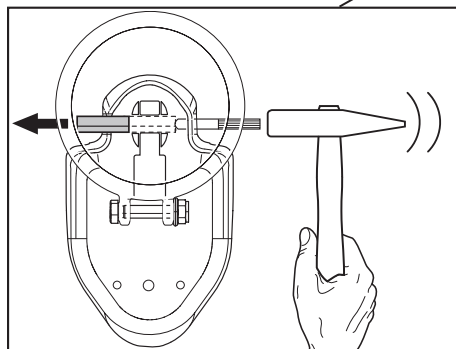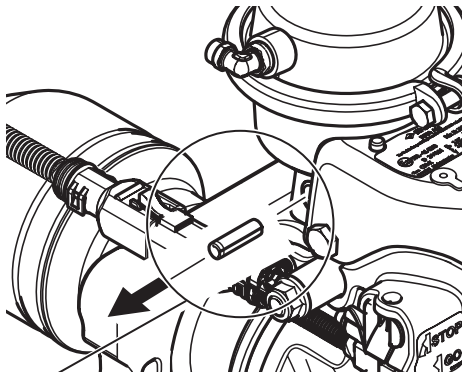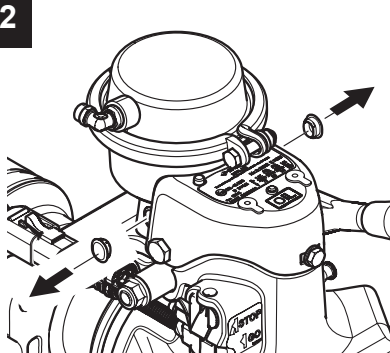



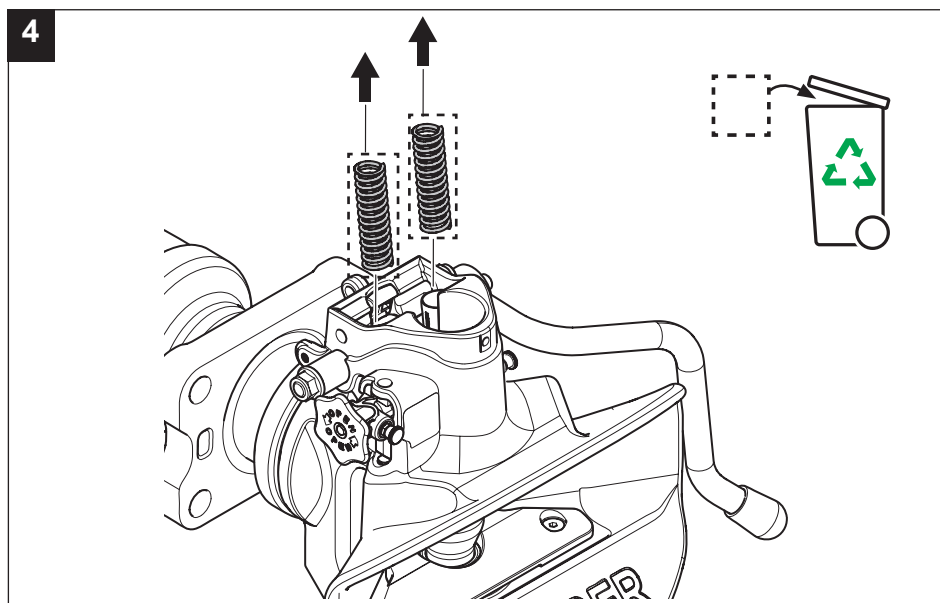
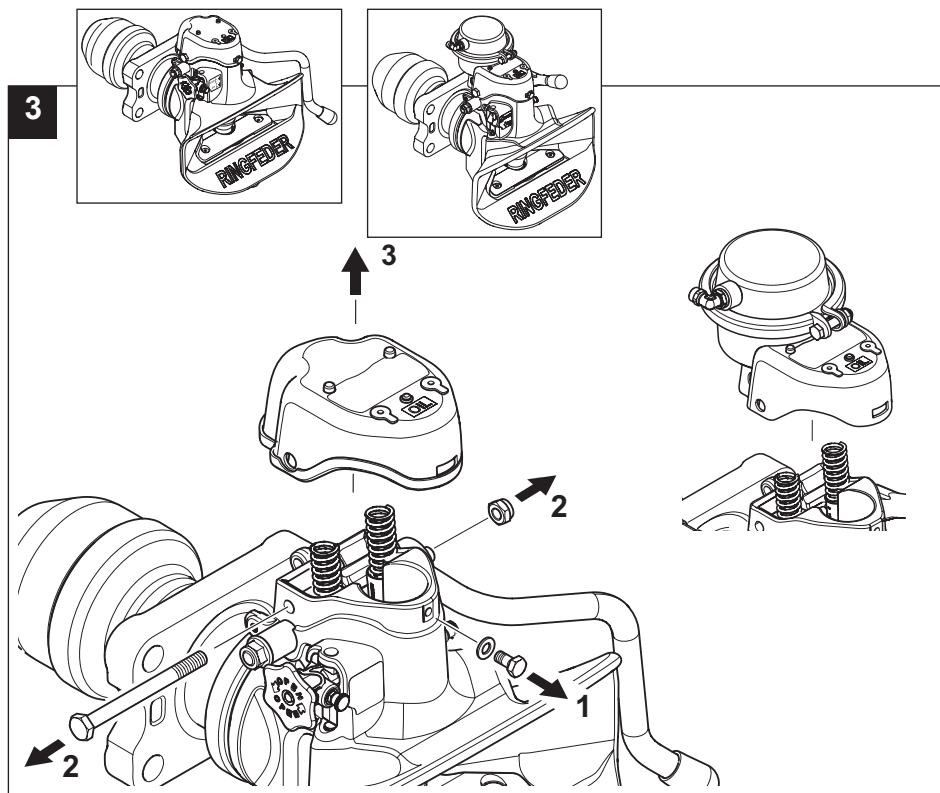


5

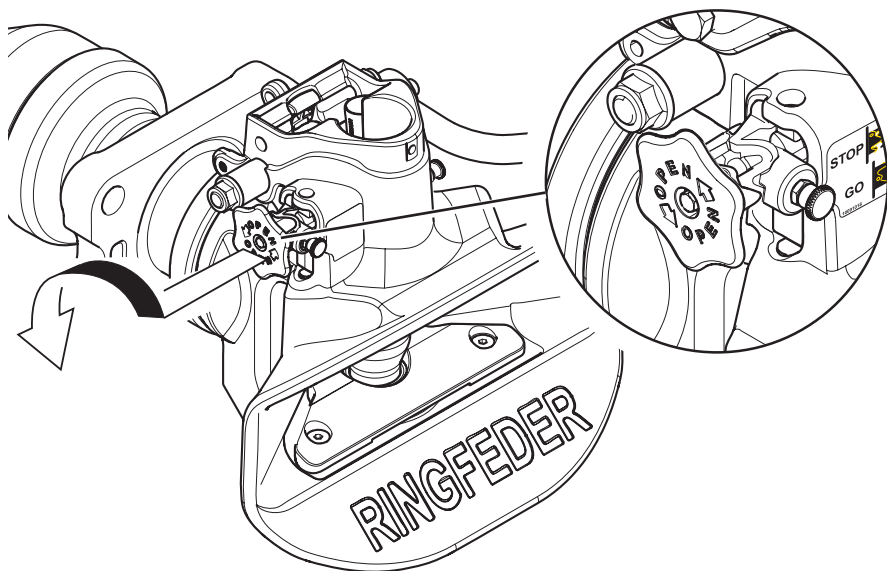


6

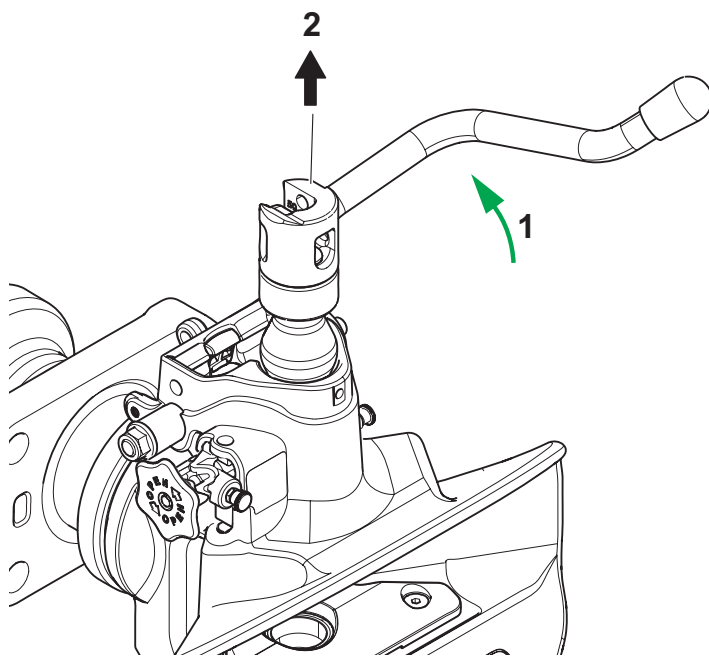

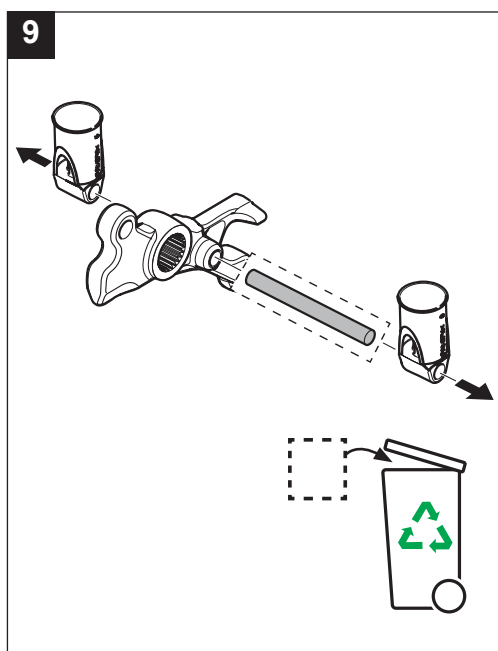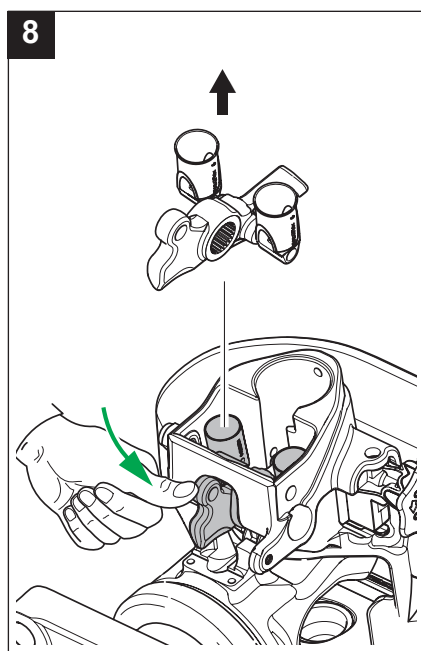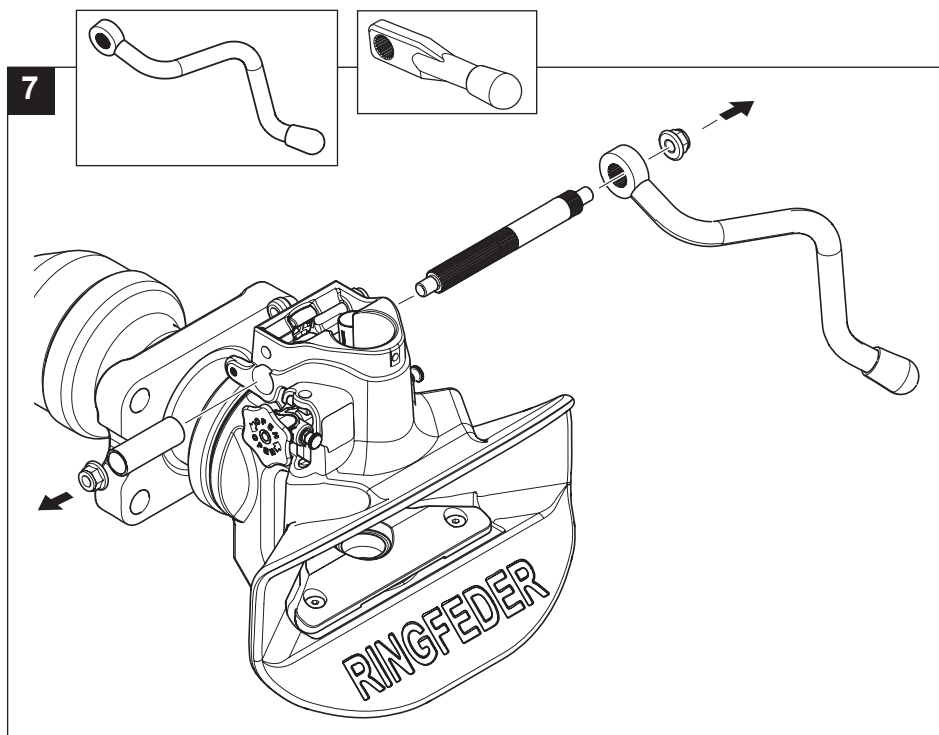





1

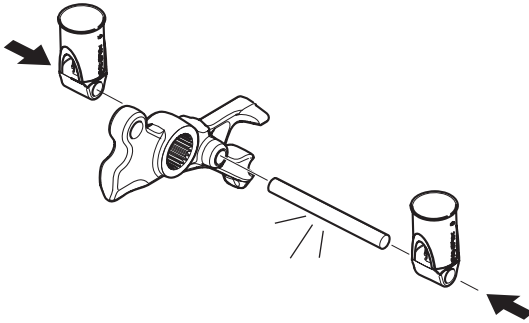

2

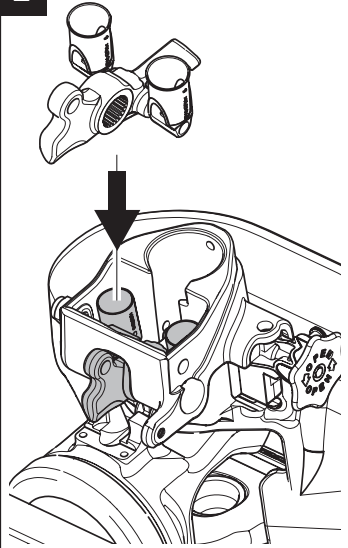

3

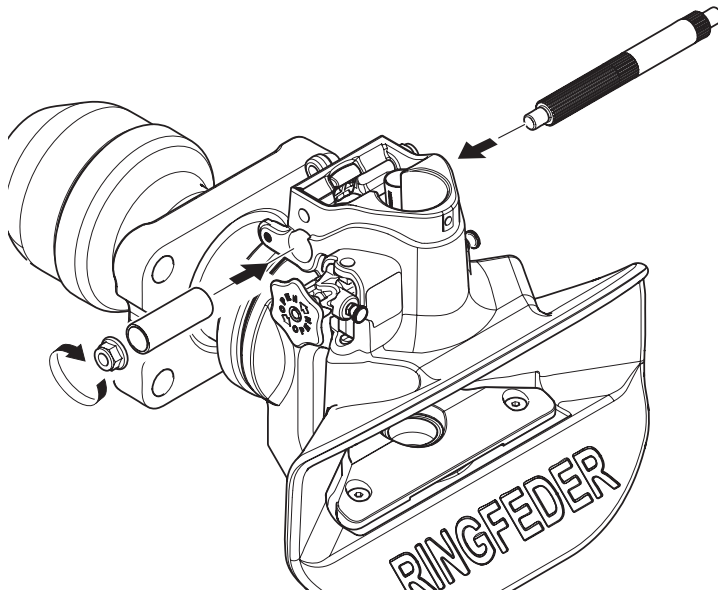


1 x M12




60 Nm


4

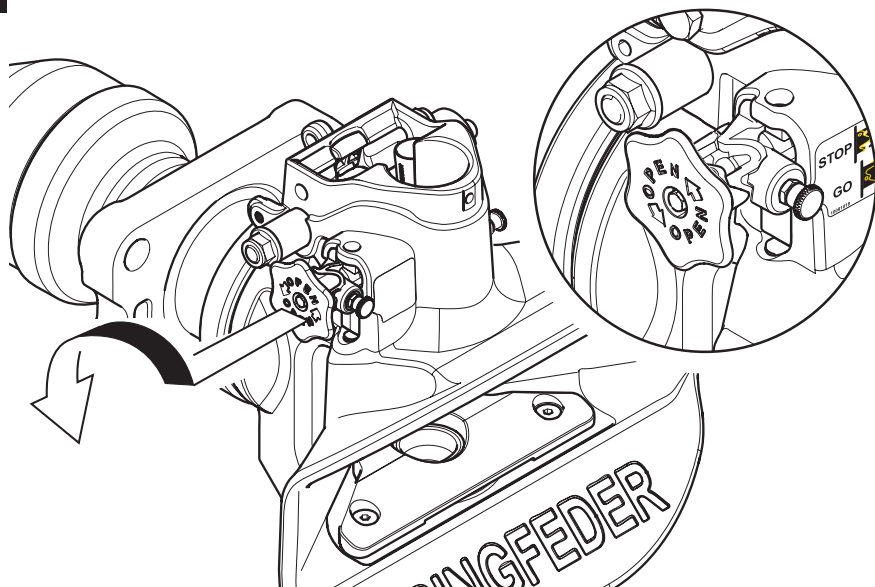




5

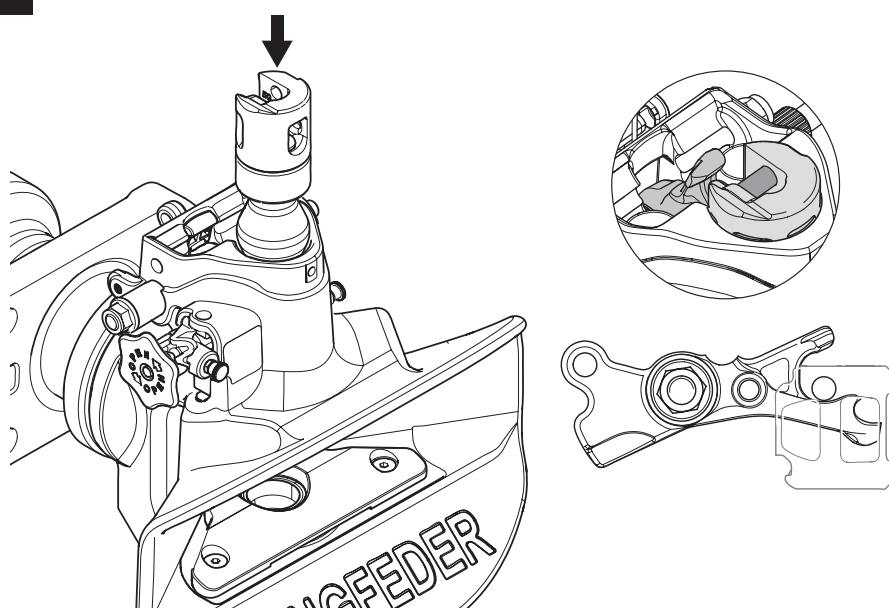


6


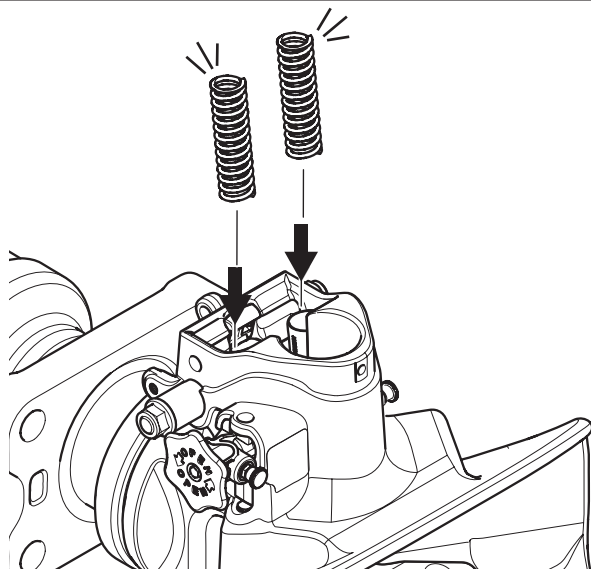


7







25 Nm


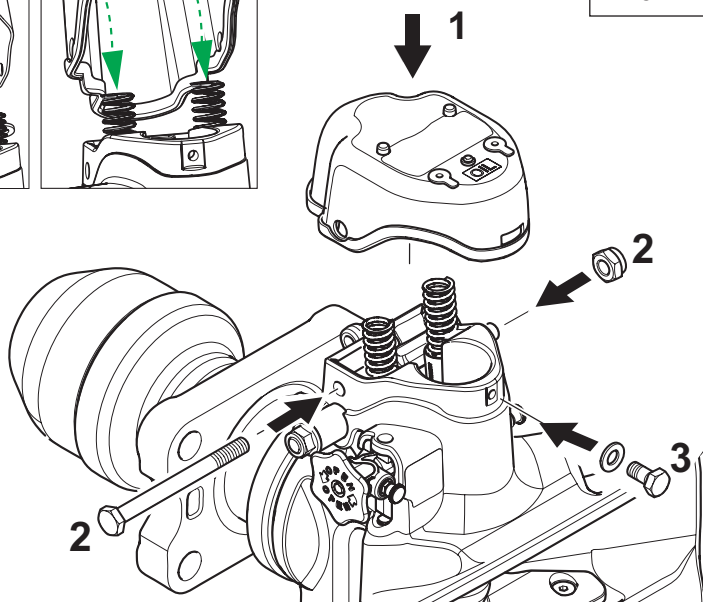


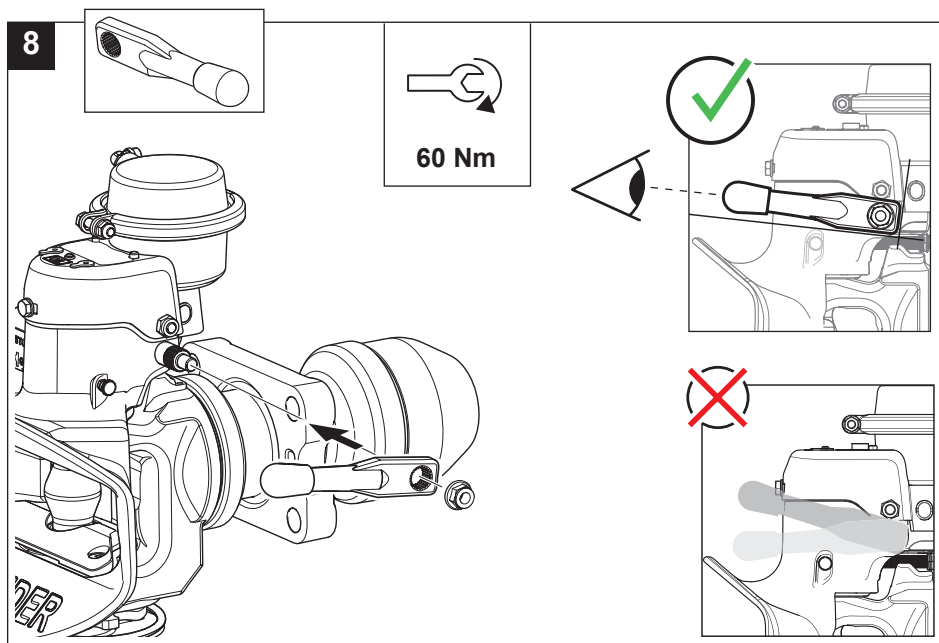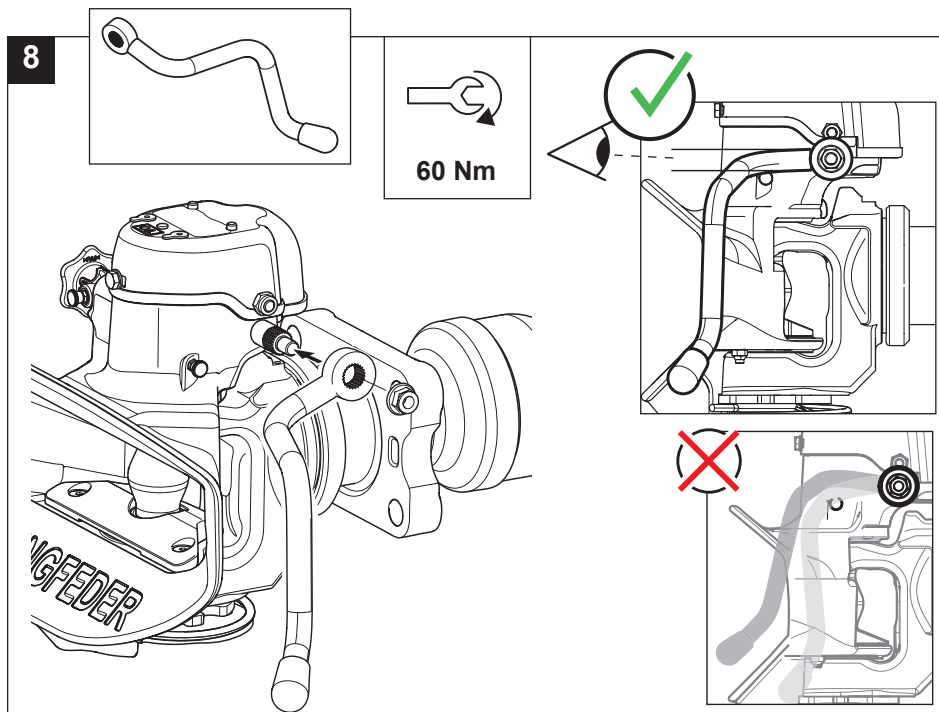

9

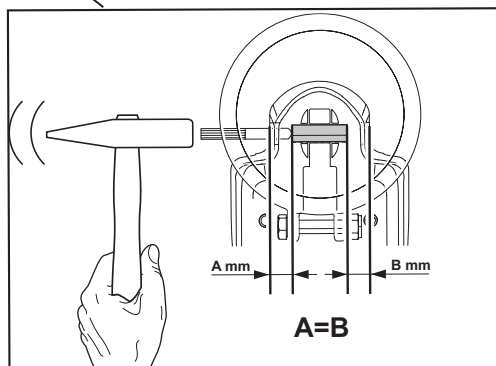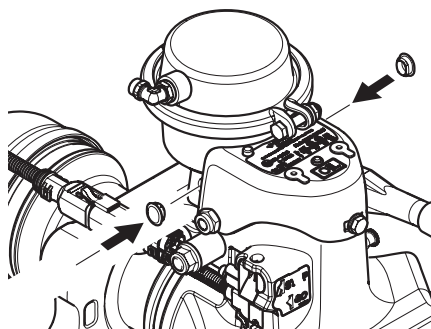
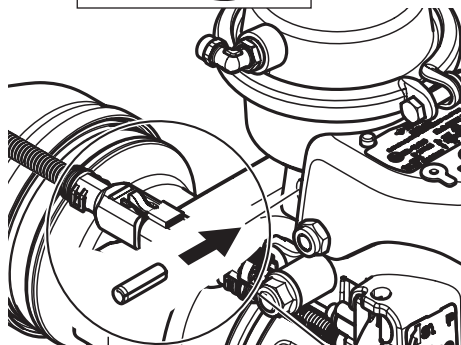



10



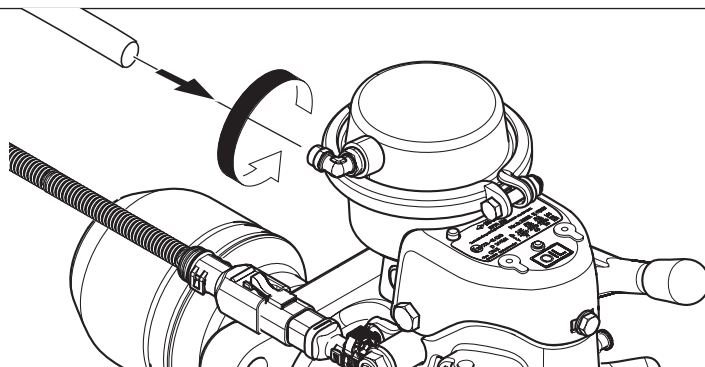


5 Nm



11









11











11



11



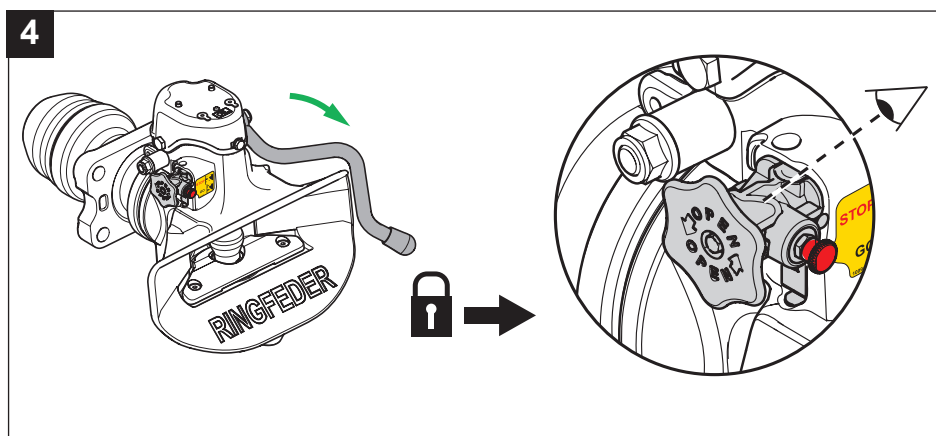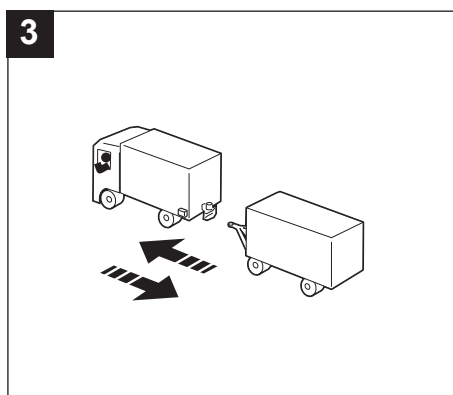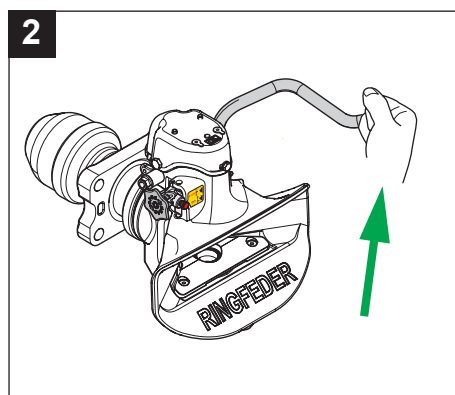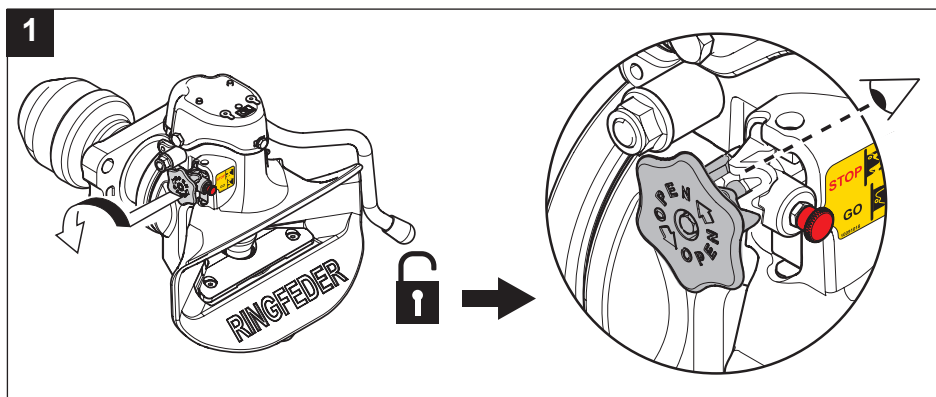

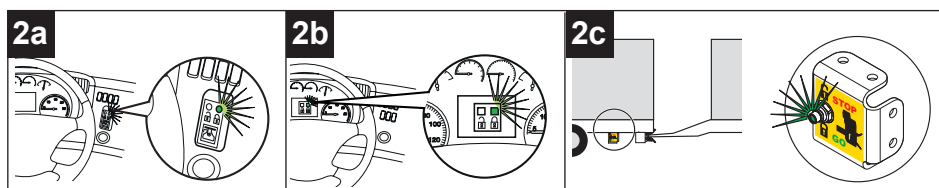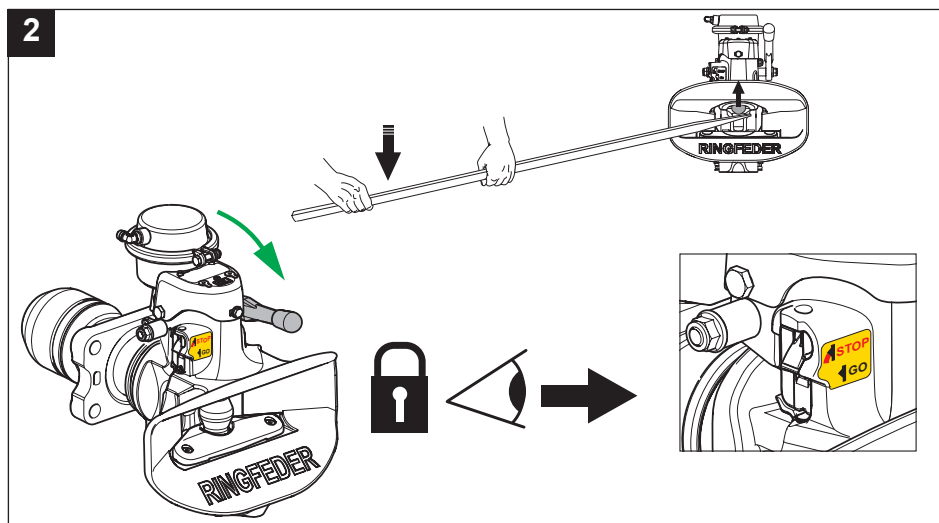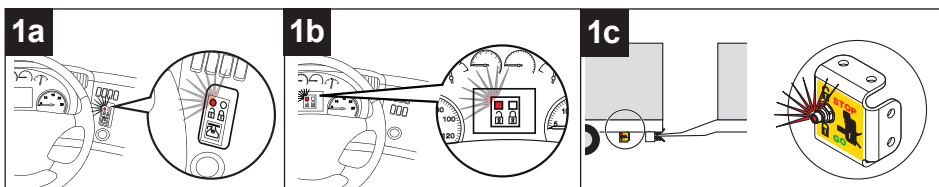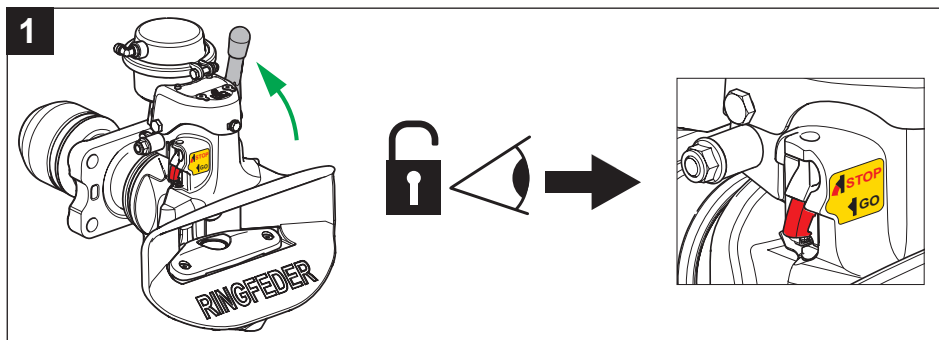



Produced in a certified company

VBG GROUP TRUCK EQUIPMENT GMBH · Girmesgath 5 · D-47803 Krefeld
www.ringfeder-rf.com

 MEMBER OF VBG GROUP